

SMART SOLUTIONS FOR
THE LABELING INDUSTRY

VIRGO - DESKTOP DIGITAL LABEL FINISHING SYSTEM



MODELS

VRG14PL

Maximum media width 140mm



Perfect on-demand short run label finishing solution for those using a digital color label printers.

Virgo is a compact desktop finishing system that unwinds, laminates labels for durability, digitally die cuts, removes excess label material around each die-cut shape, slit, and rewinds offering you everything to professionally cut and finish labels.

The system provides a very accurate label finishing solution using cutting plotter technology with reduced dimensions.

This allows you to cut different types of materials and shapes on the fly without the added cost of dies.

The unit is also equipped with a cutter management tool that works in tandem with a camera forming an integrated optical black-mark registration system providing cutting speed optimization and avoiding synchronization issues.

The Virgo's core features offer the user full flexibility, limitless variations in label design with a smooth workflow.

SOME BENEFITS OF USING VIRGO:

- » Short run label production in-house means reducing inventory requirements and costs
- » Producing full bleed labels will no longer be a nightmare
- » Laminating for labels added durability (no need for special media)
- » No need to order pre-die cut label rolls
- » No need for ultra-precise label margin adjustment when printing in full bleed
- » No need to set up a minimum gap between labels when printing in full bleed (saving on media).

WASTE PRESSING ROLL

This pressing roller positioned above the waste core holder facilitates the matrix removal from the die-cut roll, reducing the risk of tearing and ensuring more precise operation of the machine.



EASY TO MOVE

Virgo series are equipped with four handles, two for each side, that allows you to easily move the machine.



SPECIFICATIONS

Part number	VRG14PL	VRG22PL
Input / Output max. roll diameter	200mm (7.87")	200mm (7.87")
Minimum media width	100mm (3.94")	100mm (3.94")
Maximum media width	140mm (5.51")	225mm (8.86")
Maximum cutting width	122mm (4.80")	200mm (7.87")
Minimum / Maximum label length	10mm (0.39") / 350mm* (13.77") *with limitations	
Minimum slitting width	19mm (0.75")	
Number of slitting blades	up to 6	up to 8
Lamination module	YES	
Dimensions	L = 116 cm (45.66") H = 68 cm (26.77") W = 68 cm (26.77")	
Weight (estimated)	180 kg (396 lb)	200 kg (440 lb)
Roll core size	76mm (3")	
Maximum media thickness	0.25mm (10 mil)	
Maximum cut speed	600mm/s (24 in/s) in all directions	
Warranty	One year parts and labor. Usage limitation may apply	

UNWINDING

LAMINATION

KNIFE
CUTTING

WASTE
MATRIX
REMOVAL

SLITTING

REWINDING
TO FINISHED
ROLLS

SMART SOLUTIONS FOR THE LABELING INDUSTRY

VIRGO - DESKTOP DIGITAL LABEL FINISHING SYSTEM



PLOTTER SPECIFICATIONS	
Data interface	USB 2.0
Linear cut speed	Dependent on graphic
Programmable Cutting Force	20 gf - 300 gf in 31 steps (Max 300 gf)
Cut precision	0.3mm (0.012")
Test cut function	Yes
Cut to registration	Single point registration black-mark (4mm (0.16") or 2mm (0.08") square)
Cut ability	Both printed and unprinted media
Interface & Software	Virgo Software (PC only (Windows x32 and X64) Win 7, Win 8.x, Win 10) cutter management tool.
Power requirements	100-240 VAC, 240 watts


VIRGO CUTTING MANAGER

Virgo software works together with a camera forming an integrated optical black-mark registration system.

With this software, the operator can import the cutting files created on Adobe Illustrator or Corel Draw which is also used to create the black marker.

The Virgo is equipped with a camera used to detect the black-mark printed on the media. This camera assist the software in detecting the black-mark created inside the cutting file.

This process tells the plotter when and where to start cutting the media.

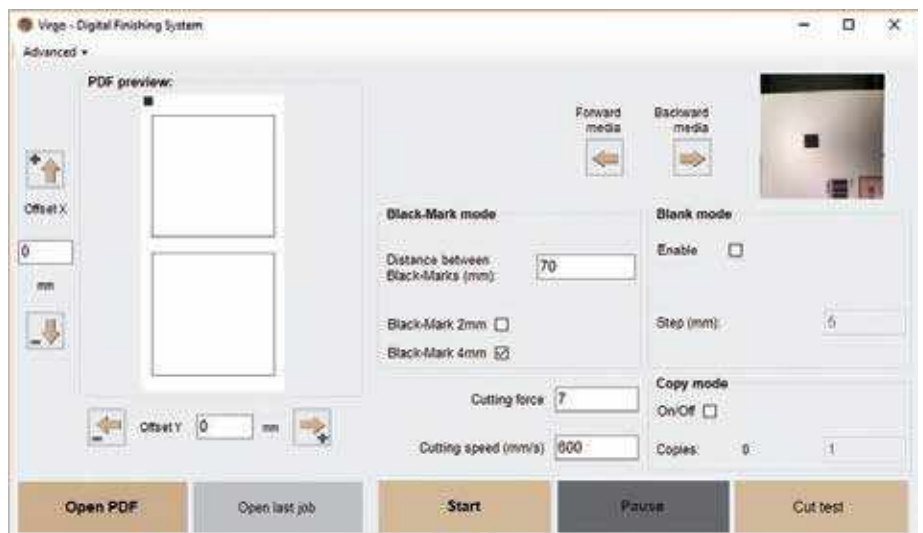

**.pdf files
input**



**easy
to use**



**save
times**





Laminating sensor




Knife cutting



Camera



Ultrasonic tension arm

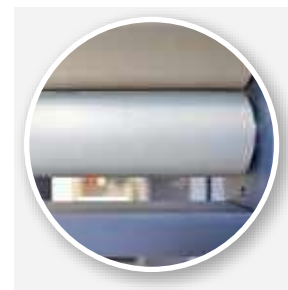

Coupling rollers



Adjustable guides



Sponge pressing roll



Matrix remover



Cutting



Remove unwanted waste from the edge of the roll

WHAT VIRGO HAS AND THE COMPETITION DOESN'T...

Optical Sensing	With the help of the camera, the Virgo uses an integrated optical black-mark registration system allowing it to read one black-mark for each cutting layout, optimizing cutting speed with no synchronization issues.
Size Does Matter	Virgo compact size help operators have more room to easily and quickly load the media and get the machine ready to work in a few minutes.
Media Track	Virgo is equipped with an ultrasonic sensor system that generates a loop of media both in plotter input and output in order to guarantee a smooth media track during the cutting operations.
Slitter Blades	Virgo is equipped with inexpensive multi edge blades helping to extend the life of the blade.
Blank Labels	Cutting blank labels on the Virgo is hassle free. With the help of the Virgo software, operators will only need to set label step, meaning there's no need to load media with a pre-printed black-marker.
Software	Virgo proprietary software can be installed on any Windows based computer running XP or later.
Remote Assistance	Customers whose computers are connected to internet can be reached by one of our operators for remote assistance and firmware upgrades.

CONTACT US NOW TO SEE THEM IN ACTION OR FOR SAMPLES & COSTINGS



labels



thermal printers



digital printers



support

QLM Label Makers Pty Ltd ABN 46 009 710 614

Head Office PO Box 512 Acacia Ridge LPO QLD 4110

p 1300 792 782 **e** qlm@qlm.com.au

Label Print Systems Pty Ltd

Showroom 1 Australand Drive, Berrinba QLD 4117

p 1800 113 904 **e** sales@labelprintsystems.com.au

qlm.com.au **labelprintsystems.com.au**